

## Valta84

**Luminaire Features**

LED Qty	1	
LED Type	Samsung	
LED Power	35.0w	
System Power	40.0w	
CCT	Neutral White	4000k
	Warm White	3000k
Luminous Efficacy	Neutral White	3200 Lumens ± 10%
	Warm White	3000 Lumens ± 10%
CRI	Neutral White	Ra ≥ 83
	Warm White	Ra ≥ 83
Beam Angle	80°	
UGR	>19	
Primary Voltage	AC240v	
Secondary Voltage	DC31v - 35v	
Secondary Current	1050mA (Constant Current)	
Driver	Tridonic (Non-Dim or DALI)	
Operating Temp	-20°C to 50°C	
Ingress Protection	IP65	
Service Life	50,000hrs (L70)	
Weight	1.72kg	
Install Spacing	2.0 - 3.0m	
Product Colour	White ~ Grey ~ Black Custom Colours*	

UGR < 19    IP 65             **RoHS** 2002/95/EC

**5** 100%  
YEAR  
GUARANTEE



SeerLED Pty Ltd recommends fitting luminaire and driver in accordance with national / state building regulations and AS/NZ3000 standard.

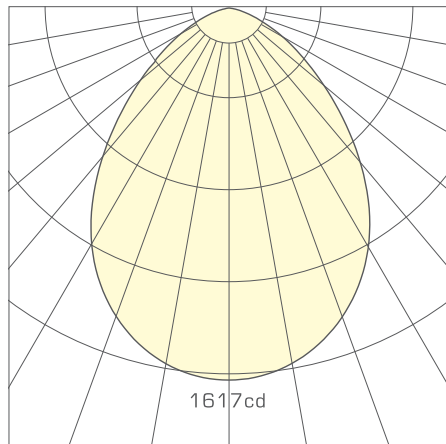
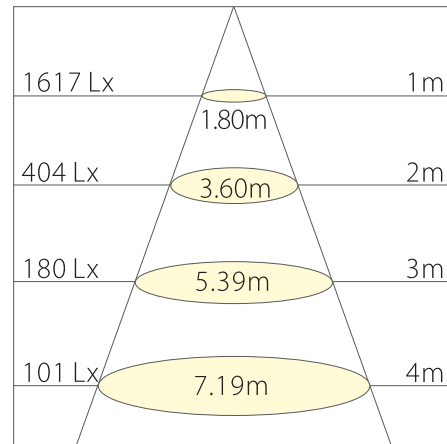
**SeerLED Pty Ltd Australia**

Head Office: PO BOX 3114, Monash Park, NSW, 2111

P: 1800 790 923 E: sales@seerled.com.au W: www.seerled.com.au

## Technical Data - Valta84 (Neutral White 4000k)

Polar Intensity Diagram

AAI Beam Diagram  
E(x) = Average lux

## Standard Order Table ~ Valta84

Model	Code	CCT	Colour	Driver
Valta84	SR-SFL230TD80-40w-NW-W	Neutral White	White	Non Dimmable
Valta84	SR-SFL230TD80-40w-NW-G	Neutral White	Grey	Non Dimmable
Valta84	SR-SFL230TD80-40w-NW-B	Neutral White	Matte Black	Non Dimmable
Valta84	SR-SFL230TD80-40w-WW-W	Warm White	White	Non Dimmable
Valta84	SR-SFL230TD80-40w-WW-G	Warm White	Grey	Non Dimmable
Valta84	SR-SFL230TD80-40w-WW-B	Warm White	Matte Black	Non Dimmable

## Custom Order Table ~ Valta84

Model	Code	CCT	Colour	Driver
Valta84	SR-SFL230TD80-40w-NW-CO	Neutral White	Custom	Non Dimmable
Valta84	SR-SFL230TD80-40w-WW-CO	Warm White	Custom	Non Dimmable

Note: When ordering custom colour options you will need to provide a RAL colour reference. This colour must be indicated on the purchase order. Colour matching can be achieved for an additional cost. Alternate Lens options must be indicated on the purchase order. Please consult with SeerLED sales staff for more information.

## Driver Options Table

Model	Manufacturer	Warranty	Dimming	C-Bus
LCI 35w 1050mA TEC SR <sup>(1)</sup>	Tridonic	3 yrs	Non Dim	No
LCAI 35w 900-1750mA ECO SR	Tridonic	5 yrs	DSI, DALI, SwitchDIM	DALI Gateway
LCAI 55w 900-1750mA ECO SR	Tridonic	5 yrs	DSI, DALI, SwitchDIM	DALI Gateway

<sup>(1)</sup>All luminaires are provided with non dimmable drivers as standard. Dimmable options must be documented on the purchase order.

SeerLED Pty Ltd recommends fitting luminaire and driver in accordance with national / state building regulations and AS/NZ3000 standard.

**SeerLED Pty Ltd Australia**

Head Office: PO BOX 3114, Monash Park, NSW, 2111

P: 1800 790 923 E: sales@seerled.com.au W: www.seerled.com.au